




1/2" Impact Wrench DTW285 1/2" (12.7 mm)



Reverse rotation auto stop mode

This mode works only with pulling the trigger fully in counterclockwise rotation. When the bolt/nut gets loosened enough, the tool stops the impact and rotation in 0.2 seconds.

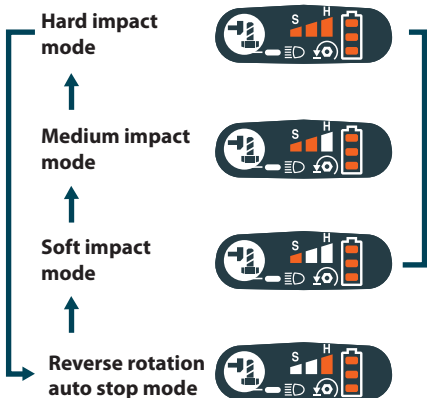

Battery fuel gauge

Electronic 3 stage impact power selection

Compact design with a short overall length of 5-3/4" (147 mm)



Phosphorescent bumper
Hammer case cover securely fastened with four bolts



LED Job light with preglow and afterglow functions

Variable speed control by trigger

Ergonomically designed handle with soft grip provides comfortable grip and more control while minimizing hand fatigue and pain.

Belt clip



Powered by Makita 18V Li-Ion Batteries

with Battery fuel gauge *without Battery fuel gauge



- BL1860B (6.0Ah)
- BL1850B (5.0Ah)
- BL1840B (4.0Ah)
- BL1830B (3.0Ah)
- *BL1815N (1.5Ah)

Rapid Charger DC18RC



Charger DC18SD



Dual Port Rapid Charger DC18RD



Maximum Fastening Torque



210 ft. lbs

Fastening torque at 6 seconds after seating, when tightening M16 (grade F10T) high strength friction grip bolt with DTW285.

1/2" Impact Wrench	DTW285 1/2" (12.7 mm)
Variable Speed	Battery Capacities 18V Li-Ion
Brake	Square Drive 1/2"
Reversing	No Load Speed 0 - 1,600/2,100/2,800 RPM
Built-in Job Light	Impacts Per Minute 0 - 1,800/2,600/3,500 IPM
Carrying Case	Maximum Tightening Torque 210 ft.lbs (280 Nm)
	Overall Length 5-3/4" (147 mm)

When QUALITY & SERVICE COUNTS – Choose Makita

makita.ca